

EL-G48E6TG

L2 스위치



EL-G48E6TG는 기가비트 이더넷 48포트를 다운링크로 제공하고 10 기가비트 SFP 6포트를 업링크로 제공하는 L2 스위치입니다.

Feature

- o 10/100/1000Base-T * 48, 1G/10GBase-R * 6, Console * 1
- o Switching Capacity 216Gbps
- o IGMP Snooping 지원
- o IEEE802.3x Flow Control 지원
- o Static routing
- o Flow classification based on L2/L3 802.1P/DSCP priority re-labeling, SP, WRR and SP+WRR, Flow monitoring and flow shaping QoS 지원
- o IEEE 802.1D/1s/1w의 STP/RSTP/MSTP를 지원
- o Console, Telnet,SSH2.0, WEB Management, SNMP v1/v2/v3, RMON 지원

Application

- o CCTV, ITV and Traffic control system
- o Campus Network
- o Community Network
- o Security system
- o Process control and monitoring system

Specification

Standard	IEEE802.3i 10Base-T IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-R IEEE 802.3x
Fixed port	10/100/1000M Base-T * 48 1G/10GBase-R * 6 Console * 1
Switching Capacity	216Gbps
Forwarding	160.7Mpps
FLASH / RAM	32MB / 512MB
MAC table	32K
L3	Static route for IPv4 and IPv6
VLAN	Port based VLAN (4K) Protocol based VLAN IEEE802.1Q, QinQ
Port Aggregation	LACP
Spanning tree	STP(IEEE802.1d) RSTP(IEEE802.1w) MSTP(IEEE802.1s)
Multicast	IGMP Snooping V2/V3 MLD Snooping V1/V2
DHCP	DHCP server/relay/client DHCP snooping/option82
QoS	Each port s 8 output queues Diff-Serv QoS 802.1P/DSCP priority re-labeling Scheduling mechanism (SP, WRR, SP+WRR) Flow monitoring and traffic shaping
ACL	L2 to L4 packet filtering function ACL based on port and VLAN
Security	Port isolation Port security IP source guard IEEE 802.1x AAA & Radius MAC learning limit ARP inspection

Management

Console, Telnet, SSH v1/v2, Web, SNMP v1/v2/v3 , TFTP

Power

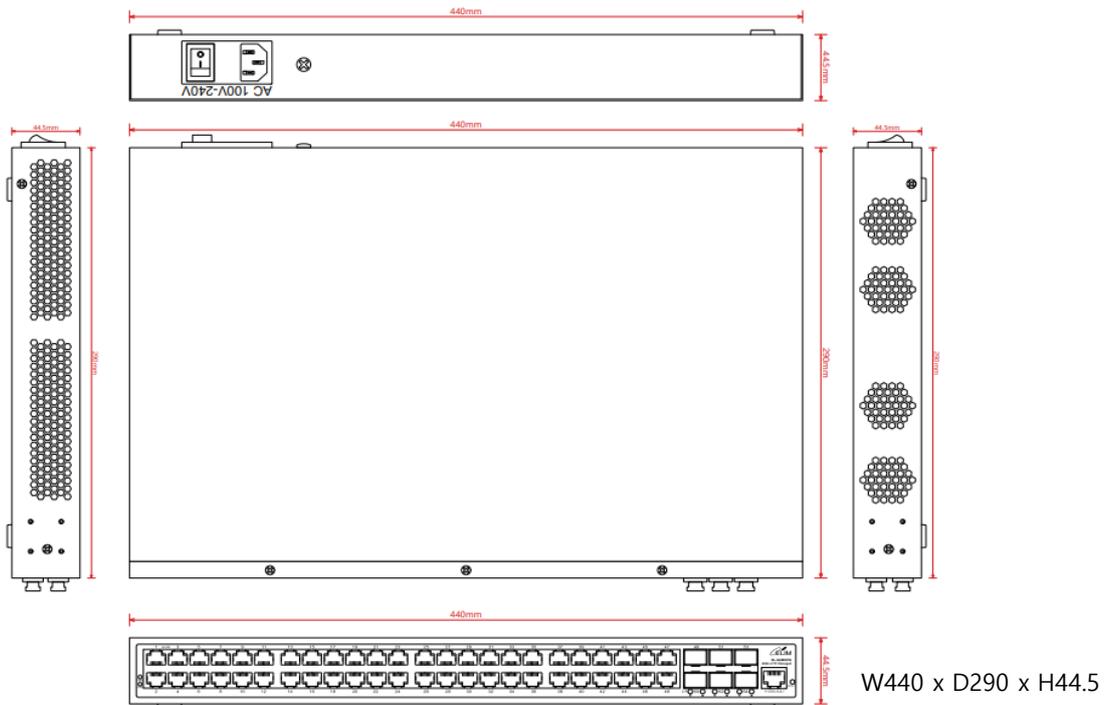
AC100~220VAC (auto-adaptable), 50-60Hz

Environment

Working temperature: -20-55°C

Storage temperature: -40-80°C

Humidity: 5-90% no condensation

Dimension

4F, 2-dong,234, Saneop-ro 155beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Republic of Korea
Tel : 031-257-7157 / Fax : 031-257-7159

E-mail : elimopt@elimopt.co.kr / Web : <http://www.elimopt.co.kr/>